

Description

The 110D Wall/Rack Modules mount two 300-pair or six 100-pair 110D blocks on an equipment rack or on the wall.

Features

- Used for main distribution, centralized station equipment, or PBX applications.
- Mounts high-density 300-pair or 100-pair 110D blocks.
- Separate horizontal and vertical jumper paths provide clearly defined jumper routing and quick tracing.
- Built-in horizontal rings keep jumpers organized.
- Pre-assembled and ready to go right out of the box.
- Modules are equipped with keyhole slots to simplify mounting.
- Made of structural grade steel.
- Listed to UL® 1863 standard for communication circuit accessories.
- Mounting hardware is included.

TRADEMARKS USED IN THIS MANUAL

UL is a registered trademark of Underwriters Laboratories Incorporated.


Any other trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.

© Copyright 2003. Black Box Corporation. All rights reserved.

1000 Park Drive • Lawrence, PA 15055-1018 • 724-746-5500 • Fax 724-746-0746



110D Wall/Rack Modules

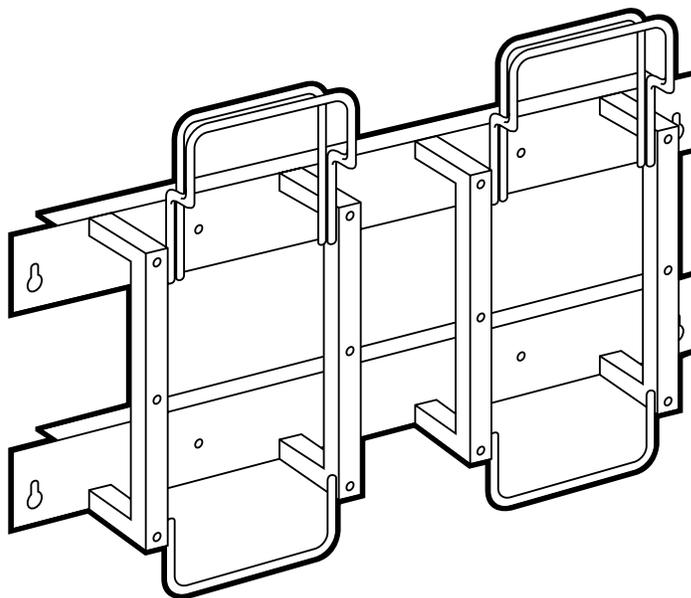

Specifications

Number of Pairs: 600

Block Capacity: (6) 100-pair or (2) 300-pair

Size: 13.4"H x 19.3"W x 5.1"D (34 x 49 x 12.9 cm)

Weight: 5 lb. (2.3 kg)

NOTE

Blocks are not included.

(continued on the back of this page)

**CUSTOMER
SUPPORT
INFORMATION**

Order toll-free in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: www.blackbox.com • E-mail: info@blackbox.com