


BLACK BOX[®]

NETWORK SERVICES

IBM PC Parallel Printer Adapter Cable

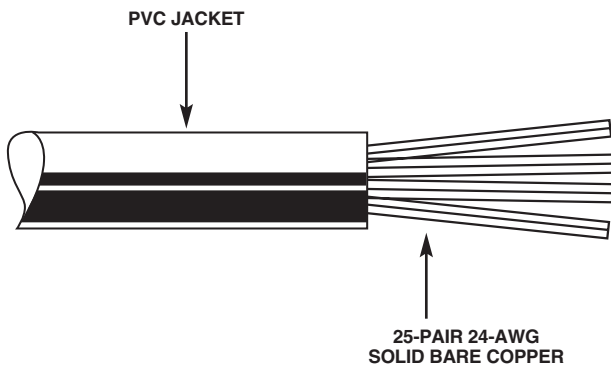

Specifications

Cable Construction: Twisted pairs, unshielded, PVC insulated and jacketed

Capacitance: 36 pF/ft. maximum

Resistance: 28.6 ohms/1000 ft. maximum

Recommended Operating Voltage: 100 volts maximum

The IBM[®] PC parallel printer adapter cable connects an IBM PC/XT[™], AT[®], or compatible to a Centronics[®] compatible printer. It is multi-pair, 24 AWG solid, bare copper cable. The cable is insulated and jacketed, unshielded, twisted-pair cable. Wiring specifications are as follows:

Pin		Pin	Wire Color
19	-----○-----	19	White/Blue
1	-----○-----	1	Blue/White
2	-----○-----	2	Orange/White
21	-----○-----	20	White/Green
3	-----○-----	3	Green/White
4	-----○-----	4	Brown/White
23	-----○-----	21	White/Gray
5	-----○-----	5	Gray/White