


USB CONVERTER

Quick Start Guide

MAY 2005

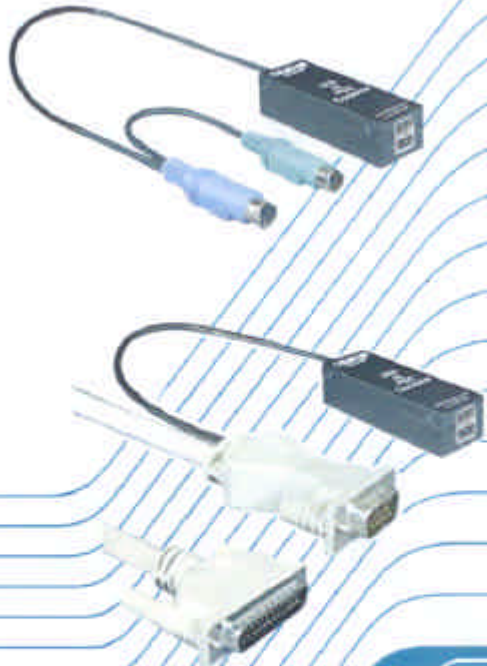

KVUSB
KVUSBNF
EHNUSB
EHNUSBNF



Models

USB Converter "In-Line" (KVUSB / KVUSBNF)



Keyboard – USB Type A
Mouse – USB Type A
Keyboard port – PS/2
Mouse port – PS/2

USB Converter "Cable" (EHNUSB / EHNUSBNF)



Keyboard – USB Type A
Mouse – USB Type A
Video – HD15M
Switch – DB25M

Installation

USB Converter "In-Line" (KVUSB / KVUSBNF)



Connect the converter's PS/2 keyboard and mouse connectors to the corresponding PS/2 connectors on the KVM cable. Connect the video monitor cable if it was disconnected, to the HD15M connector on the KVM cable.

USB Converter "Cable" (EHNUSB / EHNUSBNF)



The USB converter "Cable" is a KVM adapter cable. The DB25M connector connects directly to the DB25F KVM port on a KVM switch. The USB connectors and the HD15M connector connect to a KVM stations USB keyboard, mouse and monitor.

Visit our web site at www.blackbox.com for additional information on the USB Converter.

Features

- Converts USB protocol to PS/2 protocol
- Two models are available that can connect your USB keyboard and mouse to a KVM adapter cable, or to a PC:
 - The USB Converter "In-Line" connects to the PS/2 connectors on a KVM adapter cable
 - The USB Converter "Cable" can replace an existing KVM cable. It connects to the DB25F KVM connector on a KVM switch and to a video monitor and a USB keyboard and mouse.
- Compatible with most KVM products with DB25F connectors.
- Compact in size
- Installs easily between a KVM switch and your USB keyboard and USB mouse
- Compliant with USB 1.0 and 1.1
- Flash upgradeable for adding additional features and enhancements
- LED indicator shows power is being received from the keyboard port
- Plug-and-Play
- Made in USA

General Specifications

Dimensions:	
KVUSB	1.125W x 2.75D x 0.8H (in.) 2.860W x 17.0D x 2.03H (cm)
Connectors:	
KVUSB	USB Type A to USB keyboard USB Type A to USB mouse MiniDin6 PS/2 keyboard MiniDin6 PS/2 mouse
EHNUSB	DB25M to KVM switch H15M to KVM monitor USB Type A to USB keyboard USB Type A to USB mouse
Indicators	Power LED
Operating Temp	0°C to 40°C / 32°F to 104°C
Humidity	20% – 90% non-condensing
Approvals	CE

BLACK BOX and the  logo are registered trademarks, and ServSwitch Jr. LP are trademarks of Black Box Corporation. Any other trademarks mentioned in this document are acknowledged to be the property of the trademark owners.

© Copyright 2005, Black Box Corporation. All rights reserved.