

Multi-Configuration Shelf Mounting Options




Figure 1.
Shelf back to rack center.




Figure 2.
Shelf front flush to rack front.




Figure 3.
Shelf front 1/2" beyond rack front.

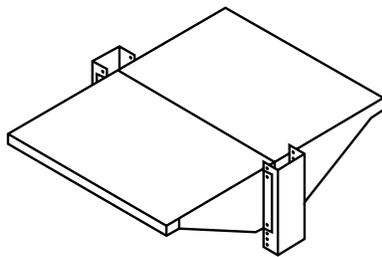


Figure 4.
Two units form a 24" double-sided shelf. Brackets can be inverted to meet mounting space requirements.

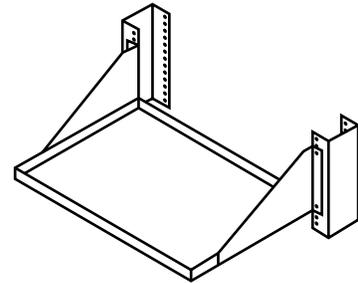



Figure 5.




Figure 6.
Shelf can be inverted to make a 3/4" deep tray.





Figure 7.
Wallmount positions.


TRADEMARKS USED IN THIS MANUAL

Any trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.

© Copyright 2003. Black Box Corporation. All rights reserved.



Multi-Configuration Shelf 19"

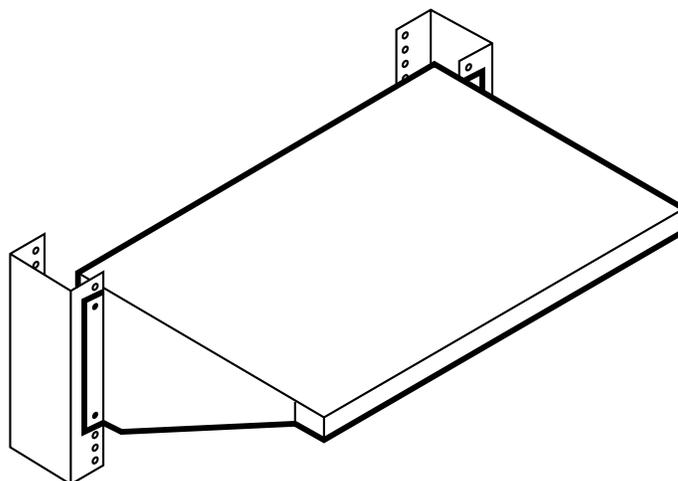

Specifications

Size: 5.25"H x 17.5"W x 12"D (13.3 x 44.5 x 30.5 cm)

Load Rating: 50 lb. (22.7 kg)

Shipping Weight: 8 lb. (3.6 kg)

Features

- Mounts in at least 18 different ways, including wallmount options. (Nine are shown on the other side of this page.)
- Installs on 3" or 6" channel equipment racks.
- Brackets invert to meet mounting space requirements.
- Shelf can be inverted to create a $\frac{3}{4}$ " deep tray.
- Mount two units back-to-back to form a double-sided shelf.
- Mounting hardware is included.
- Constructed of 16-gauge steel.

(continued on the back of this page)

**CUSTOMER
SUPPORT
INFORMATION**

Order **toll-free** in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: www.blackbox.com • E-mail: info@blackbox.com